


E10 Extrusion

Linear aluminium LED extrusion suitable for recessing or surface mounting and offered in 3 light output levels. The aluminium extrusion acts as a heat sink maximising performance and life of the LED strip, the extrusion can also be supplied in made to measure lengths. An opal diffuser ensures constant illumination without spotting or shadow lines.

- Continuous uniform light
- Samsung single bin chip
- Up to 1125 lm, efficacy 63 lm/w
- 4 oz PCB for optimum heat dissipation
- Phase, 1-10V, or Dali Dimmable

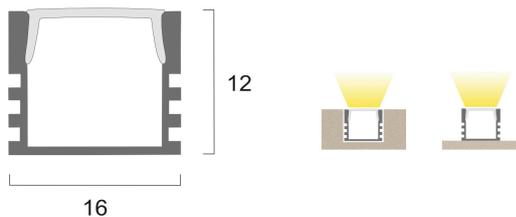

LED type	Samsung LM281B
Efficacy	Up to 63 lm/w
CRI (typical)	80+
Bin code	Single Bin
Luminaire luminous flux (LLF)	Up to 1125 lm/m
LED Lifetime	50,000hrs L70
Control Gear	Remote (included)

Power	Diffuser	CCT (°K)	LLF (lm)
5W/m	Opal	2700	334
		3000	364
		3500	365
		4000	380
10W/m		2700	641
		3000	698
		3500	700
		4000	725
15W/m		2700	928
		3000	1012
		3500	1013
		4000	1086

LLF - Luminaire Luminous Flux

Product Variants: E10-

Example Code: E10-15W-O-40-RAL-1985-P

Power	Diffuser	CCT (°K)	Finish	Length	Driver
5W/m 5W	Opal O	2700 27	Ano Alu A	Enter Length L	Non Dim ND
10W/m 10W		3000 30	RAL RAL		1-10V T
15W/m 15W		3500 35			Dali D
		4000 40			Phase P

NB Compatibility of the phase dimmer and driver must be checked prior to order