


E23 Extrusion

Linear aluminium LED extrusion suitable for surface mounting, offered in 3 light output levels. The aluminium extrusion acts as a heat sink maximising performance and life of the LED strip. The extrusion can also be supplied in made to measure lengths. The domed opal diffuser gives a wide symmetrical continuous line of illumination without spotting or shadow lines.

- continuous all round light
- Samsung or Cree single bin chip
- up to 1854 lm/m, efficacy 104 lm/w
- 4oz PCB for optimum heat distribution and longevity
- Phase, 1-10V or Dali Dimmable

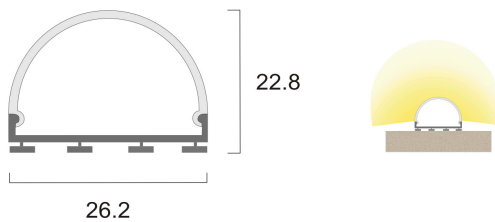

LED type	Samsung LM281B
Efficacy	Up to 104 lm/w
Luminaire luminous flux (LLF)	Up to 1854lm/m
CRI (typical)	80+
Bin code	Single bin
LED lifetime	50,000hrs L70
Control Gear	Remote (included)

Power	Diffuser	CCT (°K)	LLF (lm)
5W/m	Opal	2700	570
		3000	621
		3500	621
		4000	650
10W/m		2700	1094
		3000	1193
		3500	1194
		4000	1272
15W/m		2700	1584
		3000	1726
		3500	1728
		4000	1854

LLF - Luminaire Luminous Flux

Product Variants: E23-

Example Code: E23-15W-O-40-RAL-1985-P

Power	Diffuser	CCT (°K)	Finish	Length	Driver
5W/m 5W	Opal O	2700 27	Ano Alu A	Enter Length L	Non Dim ND
10W/m 10W		3000 30	RAL RAL		1-10V T
15W/m 15W		3500 35			Dali D
		4000 40			Phase P

NB Compatibility of the phase dimmer and driver must be checked prior to order