


E14 Extrusion

Slimline aluminium LED extrusion suitable for surface mounting, offered in 3 light output levels. An opal wrap around diffuser gives a wide light distribution and ensures constant illumination without spotting or shadow lines. The aluminium extrusion acts as a heat sink maximising the performance and life of the LED strip. Supplied complete with remote control gear.

- 10mm depth with all round light output
- Samsung single bin chip
- Up to 1642 lm/m, efficacy 92 lm/w
- 4oz PCB for optimum heat distribution and longevity
- Phase, 1-10V or Dali Dimmable

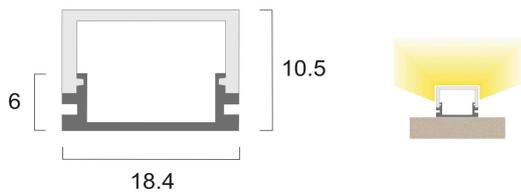

LED type	Samsung LM281B
Efficacy	Up to 92 lm/w
Luminaire luminous flux (LLF)	Up to 1642 lm/w
CRI (typical)	80+
Bin code	Single bin
Lumen maintenance	50,000hrs L70
Control gear	Remote (included)

Power	Diffuser	CCT (°K)	LLF (lm)
5W/m	Opal	2700	505
		3000	550
		3500	551
		4000	575
10W/m		2700	969
		3000	1056
		3500	1058
		4000	1127
15W/m		2700	1405
		3000	1530
		3500	1531
		4000	1642

LLF - Luminaire Luminous Flux

Product Variants: E14-

Example Code: E14-15W-O-40-RAL-1985-P

Power	Diffuser	CCT (°K)	Finish	Length	Driver
5W/m 5W	Opal O	2700 27	Ano Alu A	Enter Length L	Non Dim ND
10W/m 10W		3000 30	RAL RAL		1-10V T
15W/m 15W		3500 35			Dali D
		4000 40			Phase P

NB Compatibility of the phase dimmer and driver must be checked prior to order