


E36 Extrusion

Linear trimmed aluminium LED extrusion suitable for recessing and offered in 3 light output levels. The aluminium extrusion acts as a heat sink maximising performance and life of the LED strip, the extrusion can also be supplied in made to measure lengths. An opal diffuser ensures constant illumination without spotting or shadow lines.

- continuous uniform light
- Samsung or Cree single bin chip
- up to 1086 lm/m, efficacy 61 lm/w
- 4oz PCB for optimum heat distribution and longevity
- Phase, 1-10V or Dali Dimmable

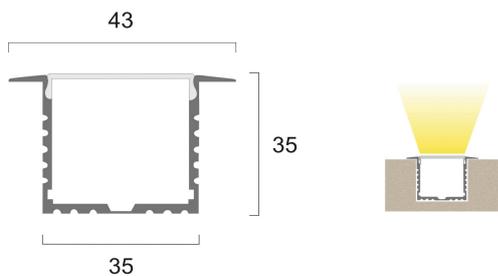

LED type	Samsung LM281B
Efficacy	Up to 61 lm/w
Luminaire luminous flux (LLF)	Up to 1086 lm/m
CRI (typical)	80+
Bin code	Single bin
Lumen maintenance	50,000hrs L70
Control gear	Remote (included)

Product Variants: E36-

Example Code: E36-15W-O-40-RAL-1985-P

Power	Diffuser	CCT (°K)	Finish	Length	Driver
5W/m 5W	Opal O	2700 27	Ano Alu A	Enter Length L	Non Dim ND
10W/m 10W		3000 30	RAL RAL		1-10V T
15W/m 15W		3500 35			Dali D
		4000 40			Phase P

NB Compatibility of the phase dimmer and driver must be checked prior to order