


E37 Extrusion

Linear trimless aluminium LED extrusion suitable for recessing and offered in 3 light output levels. The extrusion can also be supplied in made to measure lengths. Trimless installation allows for the profile to be plastered into the ceiling for that all important architectural look. An opal diffuser ensures constant illumination without spotting or shadow lines.

- continuous uniform light
- Samsung single bin chip
- up to 1086 lm/m, efficacy 61 lm/w
- 4oz PCB for optimum heat distribution and longevity
- Phase, 1-10V or Dali Dimmable

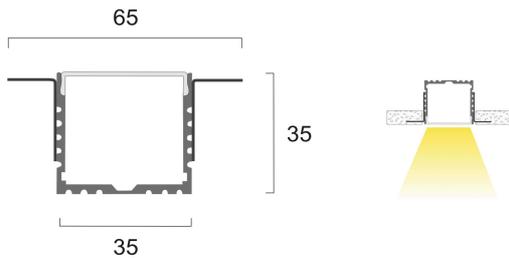

LED type	Samsung LM281B
Efficacy	Up to 61 lm/w
Luminaire luminous flux (LLF)	Up to 1086 lm/m
CRI (typical)	80+
Bin code	Single bin
LED Lifetime	50,000hrs L70
Control Gear	Remote (included)

Power	Diffuser	CCT (°K)	LLF (lm)
5W/m	Opal	2700	334
		3000	364
		3500	365
		4000	380
10W/m		2700	641
		3000	698
		3500	700
		4000	725
15W/m		2700	928
		3000	1012
		3500	1013
		4000	1086

LLF - Luminaire Luminous Flux

Product Variants: E37-

Example Code: E37-15W-O-40-RAL-1985-P

Power	Diffuser	CCT (°K)	Finish	Length	Driver
5W/m 5W	Opal O	2700 27	Ano Alu A	Enter Length L	Non Dim ND
10W/m 10W		3000 30	RAL RAL		1-10V T
15W/m 15W		3500 35			Dali D
		4000 40			Phase P

NB Compatibility of the phase dimmer and driver must be checked prior to order